
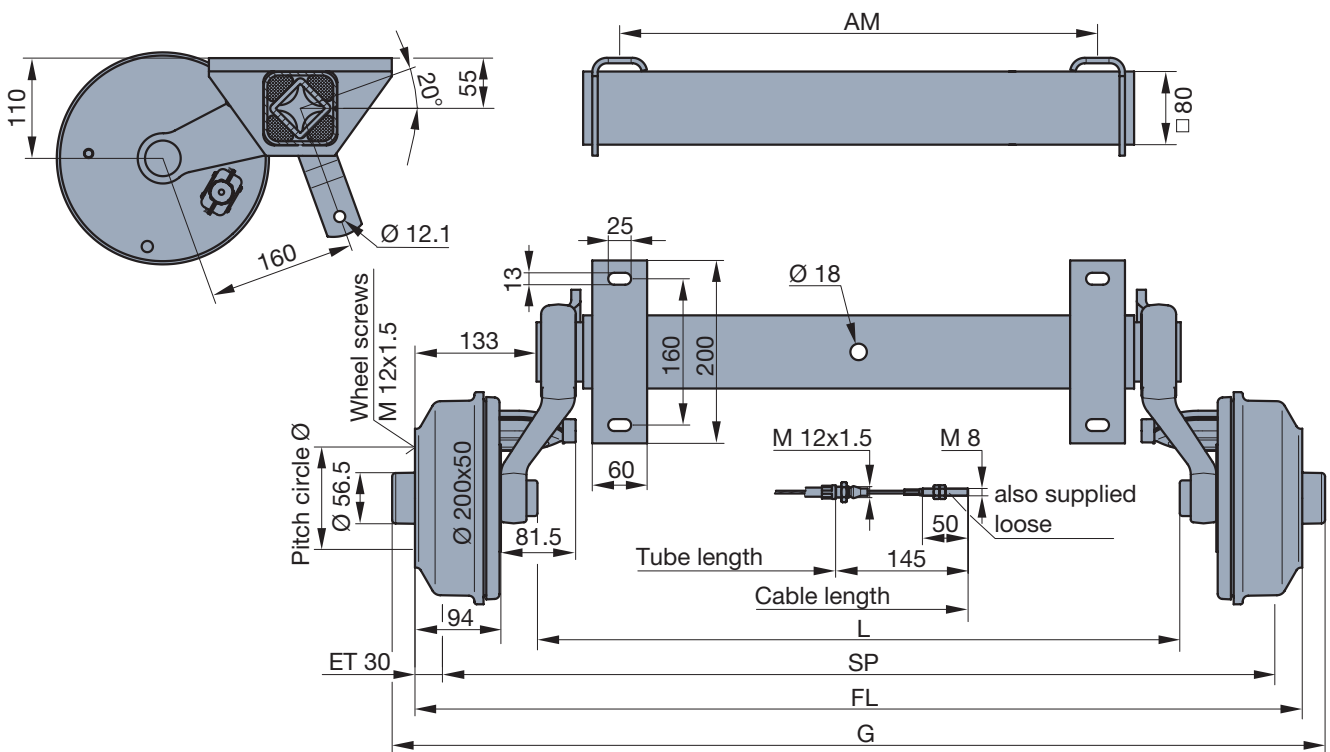


## 2.2 SWING rubber suspension axles, braked, axle load 1050 kg, wheel brake S 2005-7 RASK

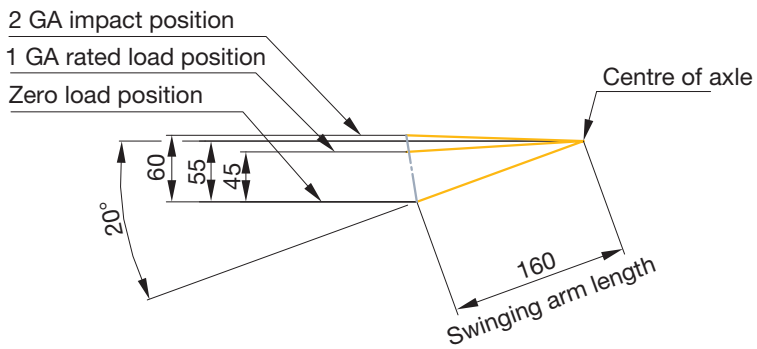

Axle beam fully hot-dip galvanised: Long-term surface protection • Independent suspension: Optimum compensation for uneven road surfaces • Zero-maintenance suspension: Reduced maintenance costs • Robust axle structure: Suitable for extreme conditions such as when driving off-road or on building sites • Robust, easy-to-maintain wedge-type brakes with automatic reversing operation: Straightforward adjustment from outside the brake, brake cables can be connected subsequently without removing the brake drums • Compact bearings (standard in the automotive industry): Zero-maintenance, long service life, protected against dirt and water, lifetime lubrication with special grease • Incl. wheel shock absorber mounting

Axle incl. brake cables loose Order no. acc. to wheel connection			Second axle for tandem incl. counter bearing welded (without brake cables)* Order no. acc. to wheel connection			Dimensions [mm]					
CB 1054	CB 1055	CB 1055	CB 1054	CB 1055	CB 1055	FL	SP	AM	L	G	Weight [kg]
4/ø100/60°	5/ø112/R12	5/ø112/60°	4/ø100/60°	5/ø112/R12	5/ø112/60°						
46.21.379.600	46.21.379.620	46.21.379.640	46.21.379.660	46.21.379.680	46.21.379.700	1450	1390	1000	1182	1500	50.8
46.21.379.601	46.21.379.621	46.21.379.641	46.21.379.661	46.21.379.681	46.21.379.701	1500	1440	1050	1232	1550	51.3
46.21.379.602	46.21.379.622	46.21.379.642	46.21.379.662	46.21.379.682	46.21.379.702	1550	1490	1100	1282	1600	51.7
46.21.379.603	46.21.379.623	46.21.379.643	46.21.379.663	46.21.379.683	46.21.379.703	1600	1540	1150	1332	1650	52.2
46.21.379.604	46.21.379.624	46.21.379.644	46.21.379.664	46.21.379.684	46.21.379.704	1650	1590	1200	1382	1700	52.6
46.21.379.605	46.21.379.625	46.21.379.645	46.21.379.665	46.21.379.685	46.21.379.705	1700	1640	1250	1432	1750	53.1
46.21.379.606	46.21.379.626	46.21.379.646	46.21.379.666	46.21.379.686	46.21.379.706	1750	1690	1300	1482	1800	53.5
46.21.379.607	46.21.379.627	46.21.379.647	46.21.379.667	46.21.379.687	46.21.379.707	1800	1740	1350	1532	1850	54.0
46.21.379.608	46.21.379.628	46.21.379.648	46.21.379.668	46.21.379.688	46.21.379.708	1850	1790	1400	1582	1900	54.4
46.21.379.609	46.21.379.629	46.21.379.649	46.21.379.669	46.21.379.689	46.21.379.709	1900	1840	1450	1632	1950	54.9
46.21.379.610	46.21.379.630	46.21.379.650	46.21.379.670	46.21.379.690	46.21.379.710	1950	1890	1500	1682	2000	55.3
46.21.379.611	46.21.379.631	46.21.379.651	46.21.379.671	46.21.379.691	46.21.379.711	2000	1940	1550	1732	2050	55.8
46.21.379.612	46.21.379.632	46.21.379.652	46.21.379.672	46.21.379.692	46.21.379.712	2050	1990	1600	1782	2100	56.2
46.21.379.613	46.21.379.633	46.21.379.653	46.21.379.673	46.21.379.693	46.21.379.713	2100	2040	1650	1832	2150	56.7
46.21.379.614	46.21.379.634	46.21.379.654	46.21.379.674	46.21.379.694	46.21.379.714	2150	2090	1700	1882	2200	57.1
46.21.379.615	46.21.379.635	46.21.379.655	46.21.379.675	46.21.379.695	46.21.379.715	2200	2140	1750	1932	2250	57.6
46.21.379.616	46.21.379.636	46.21.379.656	46.21.379.676	46.21.379.696	46.21.379.716	2250	2190	1800	1982	2300	58.0
46.21.379.617	46.21.379.637	46.21.379.657	46.21.379.677	46.21.379.697	46.21.379.717	2300	2240	1850	2032	2350	58.5
46.21.379.618	46.21.379.638	46.21.379.658	46.21.379.678	46.21.379.698	46.21.379.718	2350	2290	1900	2082	2400	58.9

\* Brake cables for tandem operation depending on the axle centre distance and flange dimension of the axle. *Brake cables incl. tandem compensation, see page 117*  
*Brake linkage components for single axle, see page 116*  
*Shock absorbers, see page 128*

Speed up to 140 km/h

Drawbar connection: Clamping components, see accessories on page 120

Recommended wheel size: 4 1/2 J x 13 H2

Special wheel connections: on request

Tyres: 155 R 13

Other possible tyre and wheel sizes, see page 140

Special axle supports and drawbar connections on request

Also available with waterproof bearings