
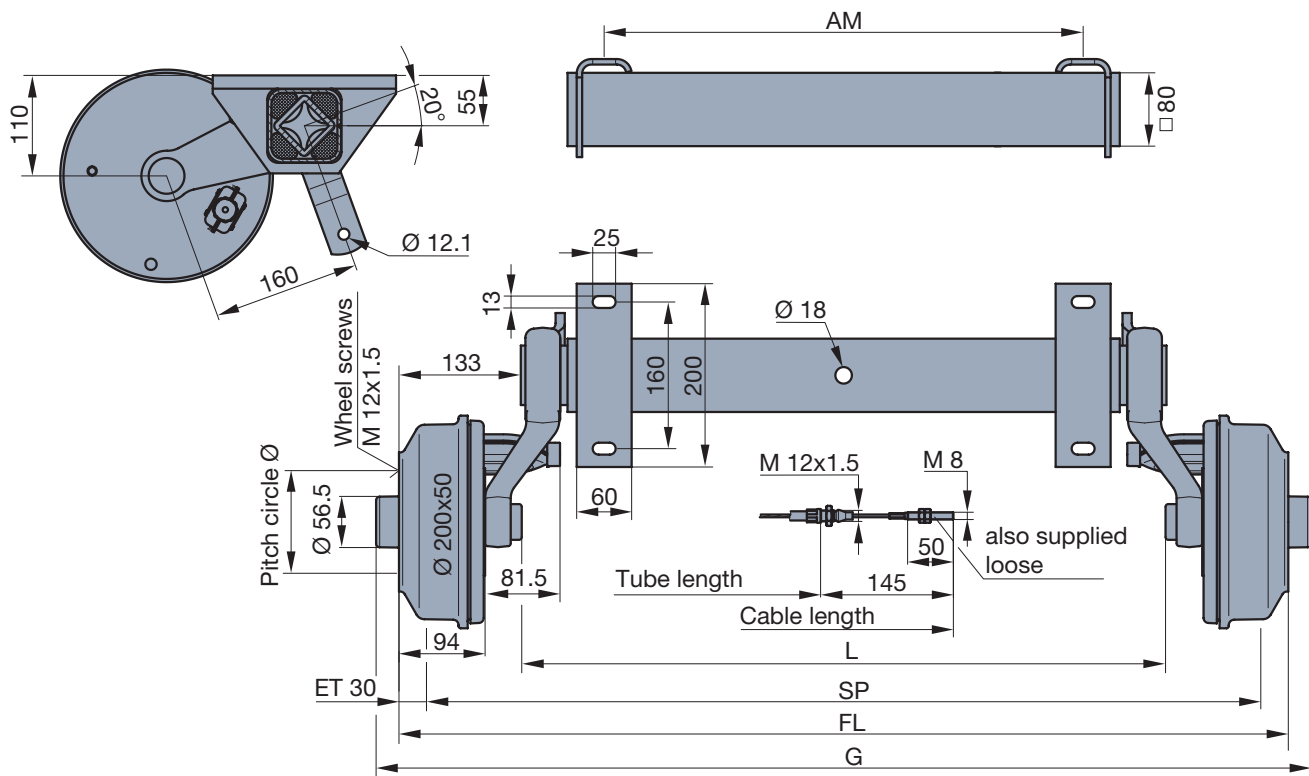


2.2 SWING rubber suspension axles, braked, axle load 1350 kg, wheel brake S 2005-7 RASK

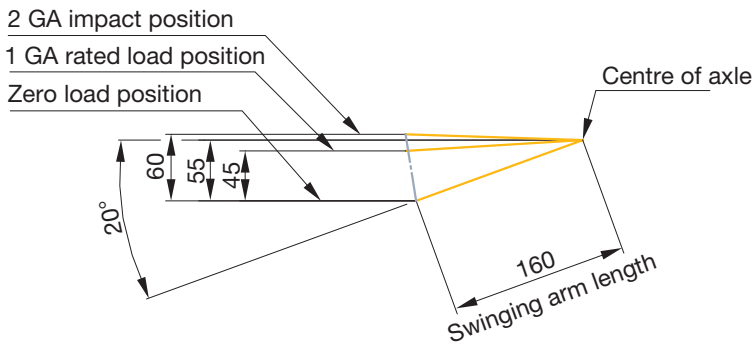

Axle beam fully hot-dip galvanised: Long-term surface protection • Independent suspension: Optimum compensation for uneven road surfaces • Zero-maintenance suspension: Reduced maintenance costs • Robust axle structure: Suitable for extreme conditions such as when driving off-road or on building sites • Robust, easy-to-maintain wedge-type brakes with automatic reversing operation: Straightforward adjustment from outside the brake, brake cables can be connected subsequently without removing the brake drums • Compact bearings (standard in the automotive industry): Zero-maintenance, long service life, protected against dirt and water, lifetime lubrication with special grease • Incl. wheel shock absorber mounting

Axle incl. brake cables loose Order no. acc. to wheel connection			Second axle for tandem incl. counter bearing welded (without brake cables)* Order no. acc. to wheel connection			Dimensions [mm]					
CB 1354	CB 1355	CB 1355	CB 1354	CB 1355	CB 1355	FL	SP	AM	L	G	Weight [kg]
4/ø100/60°	5/ø112/R12	5/ø112/60°	4/ø100/60°	5/ø112/R12	5/ø112/60°						
46.25.379.720	46.25.379.740	46.25.379.760	46.25.379.780	46.25.379.800	46.25.379.820	1450	1390	1000	1182	1500	56.6
46.25.379.721	46.25.379.741	46.25.379.761	46.25.379.781	46.25.379.801	46.25.379.821	1500	1440	1050	1232	1550	57.1
46.25.379.722	46.25.379.742	46.25.379.762	46.25.379.782	46.25.379.802	46.25.379.822	1550	1490	1100	1282	1600	57.5
46.25.379.723	46.25.379.743	46.25.379.763	46.25.379.783	46.25.379.803	46.25.379.823	1600	1540	1150	1332	1650	58.0
46.25.379.724	46.25.379.744	46.25.379.764	46.25.379.784	46.25.379.804	46.25.379.824	1650	1590	1200	1382	1700	58.4
46.25.379.725	46.25.379.745	46.25.379.765	46.25.379.785	46.25.379.805	46.25.379.825	1700	1640	1250	1432	1750	58.9
46.25.379.726	46.25.379.746	46.25.379.766	46.25.379.786	46.25.379.806	46.25.379.826	1750	1690	1300	1482	1800	59.3
46.25.379.727	46.25.379.747	46.25.379.767	46.25.379.787	46.25.379.807	46.25.379.827	1800	1740	1350	1532	1850	59.8
46.25.379.728	46.25.379.748	46.25.379.768	46.25.379.788	46.25.379.808	46.25.379.828	1850	1790	1400	1582	1900	60.2
46.25.379.729	46.25.379.749	46.25.379.769	46.25.379.789	46.25.379.809	46.25.379.829	1900	1840	1450	1632	1950	60.7
46.25.379.730	46.25.379.750	46.25.379.770	46.25.379.790	46.25.379.810	46.25.379.830	1950	1890	1500	1682	2000	61.1
46.25.379.731	46.25.379.751	46.25.379.771	46.25.379.791	46.25.379.811	46.25.379.831	2000	1940	1550	1732	2050	61.6
46.25.379.732	46.25.379.752	46.25.379.772	46.25.379.792	46.25.379.812	46.25.379.832	2050	1990	1600	1782	2100	62.0
46.25.379.733	46.25.379.753	46.25.379.773	46.25.379.793	46.25.379.813	46.25.379.833	2100	2040	1650	1832	2150	62.5
46.25.379.734	46.25.379.754	46.25.379.774	46.25.379.794	46.25.379.814	46.25.379.834	2150	2090	1700	1882	2200	62.9
46.25.379.735	46.25.379.755	46.25.379.775	46.25.379.795	46.25.379.815	46.25.379.835	2200	2140	1750	1932	2250	63.4
46.25.379.736	46.25.379.756	46.25.379.776	46.25.379.796	46.25.379.816	46.25.379.836	2250	2190	1800	1982	2300	63.8
46.25.379.737	46.25.379.757	46.25.379.777	46.25.379.797	46.25.379.817	46.25.379.837	2300	2240	1850	2032	2350	64.3
46.25.379.738	46.25.379.758	46.25.379.778	46.25.379.798	46.25.379.818	46.25.379.838	2350	2290	1900	2082	2400	64.7

* Brake cables for tandem operation depending on the axle centre distance and flange dimension of the axle. *Brake cables incl. tandem compensation, see page 117*
Brake linkage components for single axle, see page 116
Shock absorbers, see page 128

Speed up to 140 km/h

Drawbar connection: Clamping components, see accessories on page 120

Recommended wheel size: 5 1/2 J x 14 H2

Wheel connections: 4x98; 4x130; 5x140 on request

Tyres: 185/70 R 14

Other possible tyre and wheel sizes, see page 140

Special axle supports and drawbar connections on request

Also available with waterproof bearings