
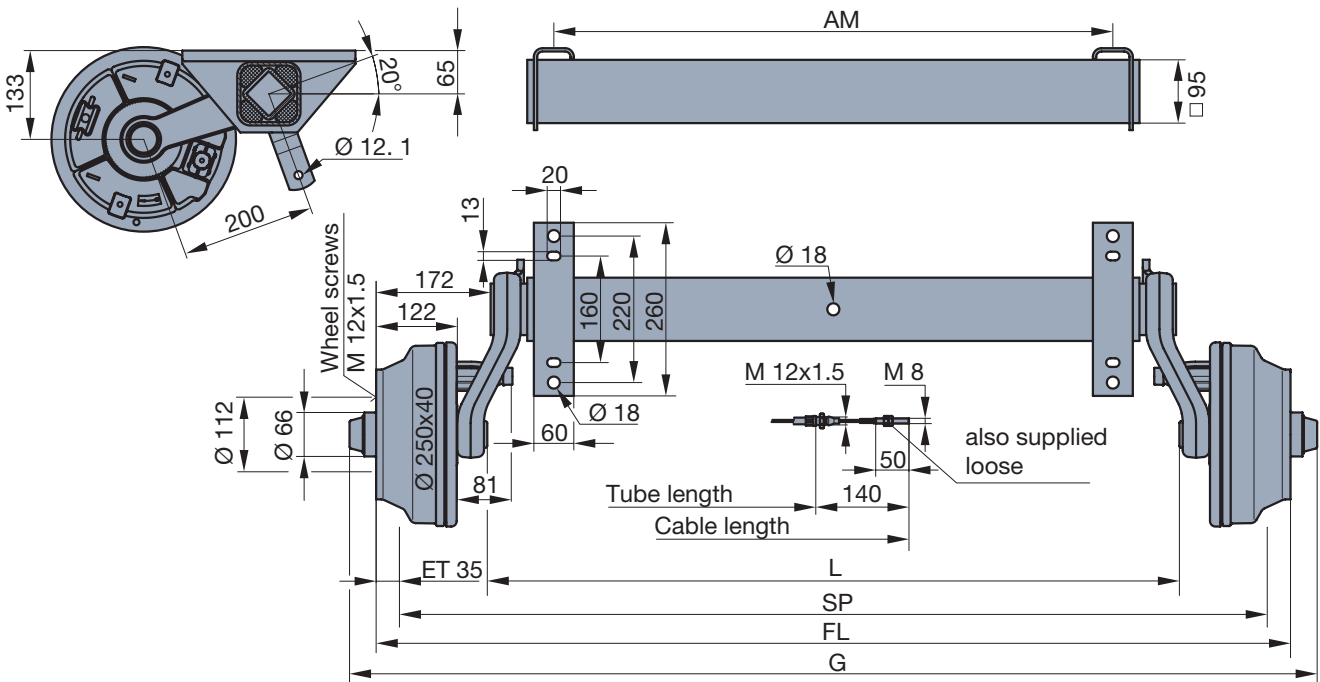


2.2 SWING rubber suspension axles, braked, axle load 1800 kg, wheel brake S 2504-7 RASK

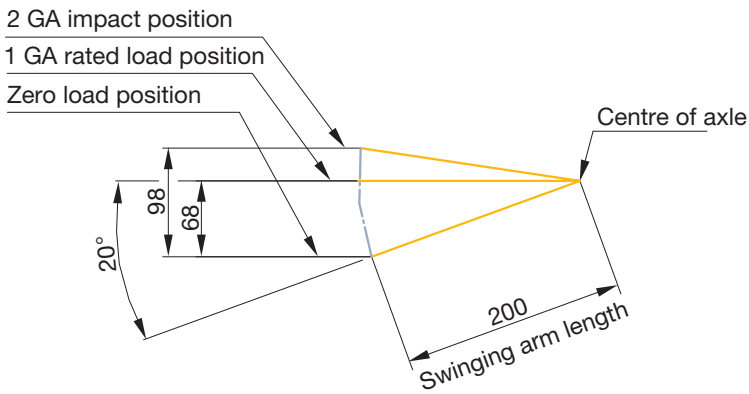

Axle beam fully hot-dip galvanised: Long-term surface protection • Independent suspension: Optimum compensation for uneven road surfaces • Zero-maintenance suspension: Reduced maintenance costs • Robust axle structure: Suitable for extreme conditions such as when driving off-road or on building sites • Robust, easy-to-maintain wedge-type brakes with automatic reversing operation: Straightforward adjustment from outside the brake, brake cables can be connected subsequently without removing the brake drums • Incl. wheel shock absorber mounting

Axle incl. brake cables loose Order no.		Second axle for tandem incl. counter bearing welded (without brake cables)* Order no.		Dimensions [mm]				Weight [kg]	
CB 1805		CB 1805		FL	Sp	AM	L		G
5/ø112/R12	5/ø112/R12								
46.32.368.400	46.32.368.420	1535	1465	1000	1200	1620	78.0		
46.32.368.401	46.32.368.421	1585	1515	1050	1250	1670	78.5		
46.32.368.402	46.32.368.422	1635	1565	1100	1300	1720	79.0		
46.32.368.403	46.32.368.423	1685	1615	1150	1350	1770	79.5		
46.32.368.404	46.32.368.424	1735	1665	1200	1400	1820	80.0		
46.32.368.405	46.32.368.425	1785	1715	1250	1450	1870	80.5		
46.32.368.406	46.32.368.426	1835	1765	1300	1500	1920	81.0		
46.32.368.407	46.32.368.427	1885	1815	1350	1550	1970	81.5		
46.32.368.408	46.32.368.428	1935	1865	1400	1600	2020	82.0		
46.32.368.409	46.32.368.429	1985	1915	1450	1650	2070	82.5		
46.32.368.410	46.32.368.430	2035	1965	1500	1700	2120	83.0		
46.32.368.411	46.32.368.431	2085	2015	1550	1750	2170	83.5		
46.32.368.412	46.32.368.432	2135	2065	1600	1800	2220	84.0		
46.32.368.413	46.32.368.433	2185	2115	1650	1850	2270	84.5		
46.32.368.414	46.32.368.434	2235	2165	1700	1900	2320	85.0		
46.32.368.415	46.32.368.435	2285	2215	1750	1950	2370	85.5		
46.32.368.416	46.32.368.436	2335	2265	1800	2000	2420	86.0		
46.32.368.417	46.32.368.437	2385	2315	1850	2050	2470	86.5		

* Brake cables for tandem operation depending on the axle centre distance and flange dimension of the axle. *Brake cables incl. tandem compensation, see page 117*
Brake linkage components for single axle, see page 116
Shock absorbers, see page 128

Speed up to 140 km/h

Drawbar connection: Clamping components, see accessories on page 120

Recommended wheel size: 6 J x 14 H2

Wheel connections: 5x140 on request

Tyres: 205 R 14 C

Other possible tyre and wheel sizes, see page 140

Special axle supports and drawbar connections on request