



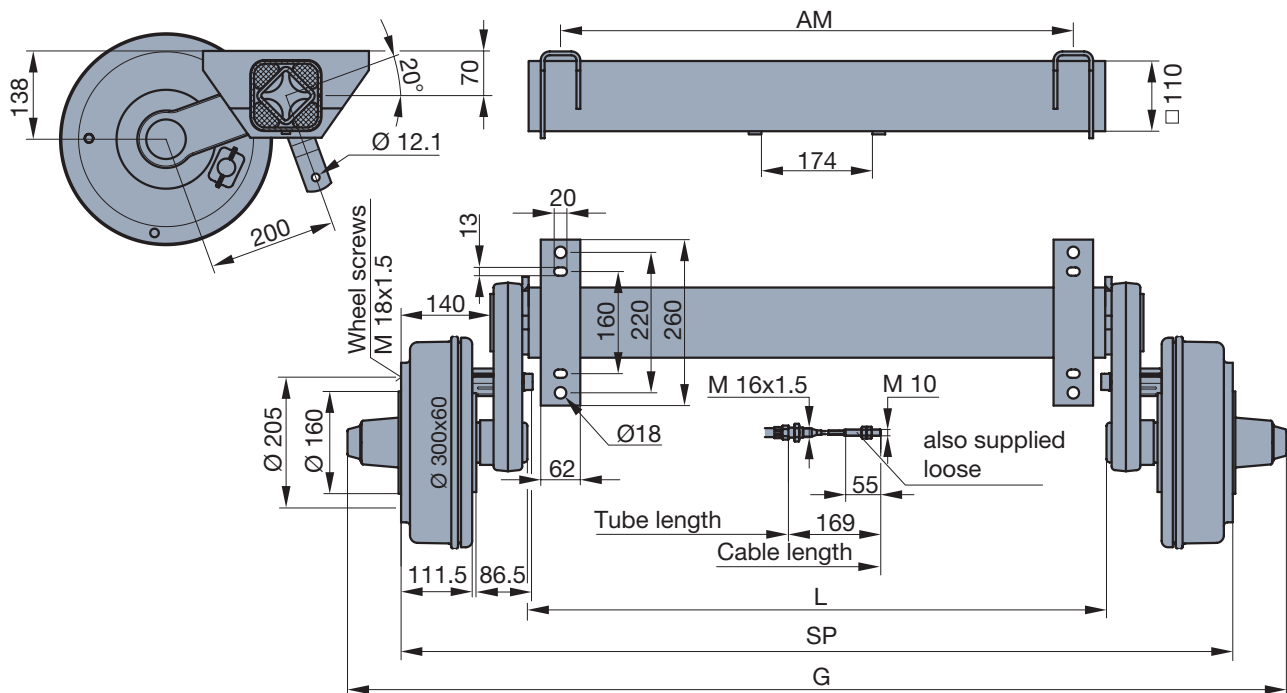

## 2.2 SWING rubber suspension axles, braked, axle load 2100 kg, wheel brake S 3006-7 RASK

- 2 GA impact position
- 1 GA rated load position
- Zero load position

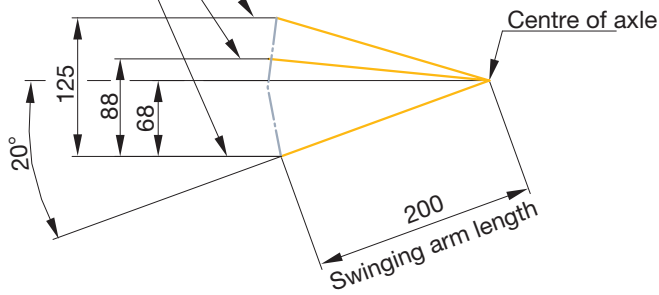

[ Axles & axle systems ]

Axle beam fully hot-dip galvanised: Long-term surface protection • Independent suspension: Optimum compensation for uneven road surfaces • Zero-maintenance suspension: Reduced maintenance costs • Robust axle structure: Suitable for extreme conditions such as when driving off-road or on building sites • Robust, easy-to-maintain wedge-type brakes with automatic reversing operation: Straightforward adjustment from outside the brake, brake cables can be connected subsequently without removing the brake drums • Incl. wheel shock absorber mounting

ø160/ø205	Marketed under Order no.	Dimensions [mm]				Weight [kg]
	CS 2106	SP	AM	L	G	
46.37.373.100	1500	1000	1104	1668	101.0	
46.37.373.101	1600	1100	1204	1768	103.0	
46.37.373.102	1700	1200	1304	1868	105.0	
46.37.373.103	1800	1300	1404	1968	107.0	
46.37.373.104	1900	1400	1504	2068	109.0	
46.37.373.105	2000	1500	1604	2168	111.0	
46.37.373.106	2100	1600	1704	2268	113.0	
46.37.373.107	2200	1700	1804	2368	115.0	
46.37.373.108	2300	1800	1904	2468	117.0	

Brake linkage components for single axle, see page 116  
Shock absorbers, see page 128

Speed up to 140 km/h

Drawbar connection: Clamping components, see accessories on page 120

Recommended wheel size: 6 J x 14 H2

Wheel connections: 5x140 on request

Tyres: 205 R 14 C

Other possible tyre and wheel sizes, see page 140

Special axle supports and drawbar connections on request