



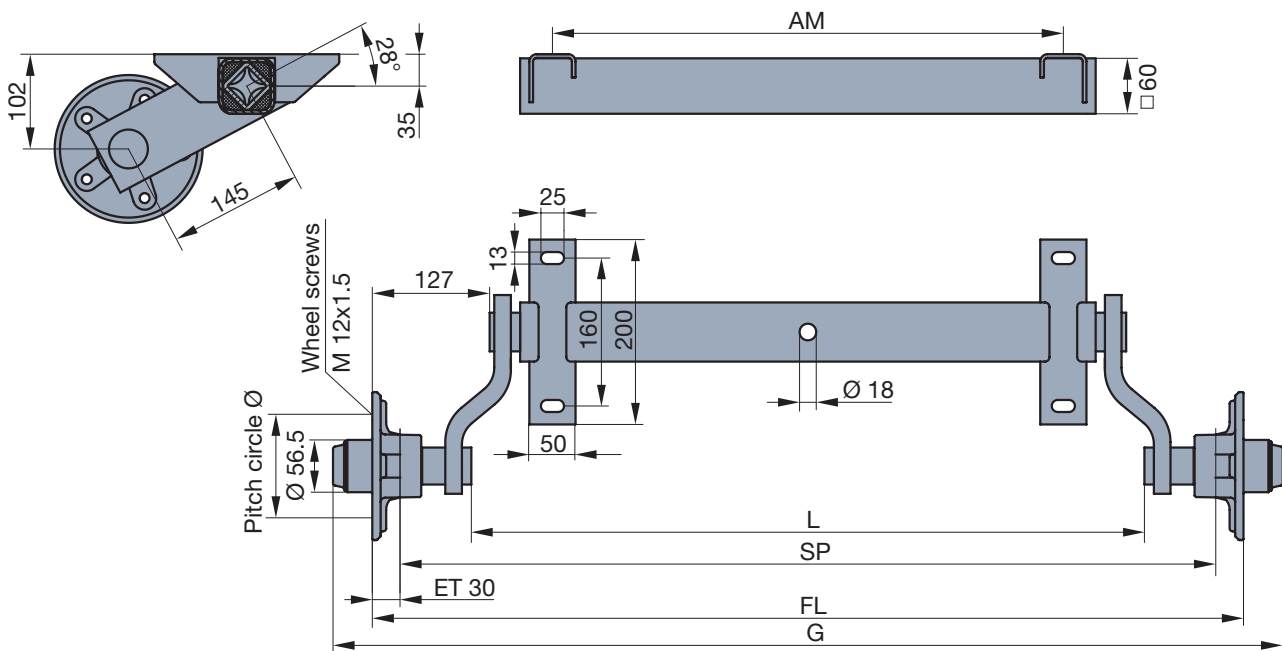

## 2.1 SWING rubber suspension axles, unbraked, axle load 750 kg

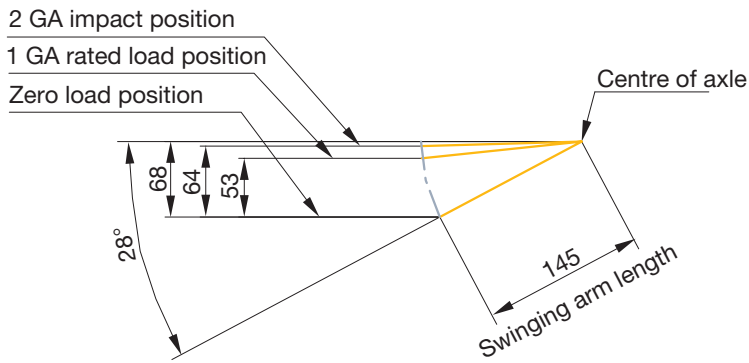

Axle beam fully hot-dip galvanised: Long-term surface protection • Independent suspension: Optimum compensation for uneven road surfaces • Zero-maintenance suspension: Reduced maintenance costs • Robust axle structure: Suitable for extreme terrain such as when driving off-road or on building sites

Marketed under Order no. acc. to wheel connection		Dimensions [mm]					Weight [kg]
CB 754	CB 755	FL	SP	AM	L	G	
4/ø100/60°	5/ø112/R12						
46.14.000.200	46.14.000.220	1240	1180	850	1025	1325	22.4
46.14.000.201	46.14.000.221	1290	1230	900	1075	1375	22.7
46.14.000.202	46.14.000.222	1340	1280	950	1125	1425	23.0
46.14.000.203	46.14.000.223	1390	1330	1000	1175	1475	23.3
46.14.000.204	46.14.000.224	1440	1380	1050	1225	1525	23.6
46.14.000.205	46.14.000.225	1490	1430	1100	1275	1575	24.0
46.14.000.206	46.14.000.226	1540	1480	1150	1325	1625	24.3
46.14.000.207	46.14.000.227	1590	1530	1200	1375	1675	24.6
46.14.000.208	46.14.000.228	1640	1580	1250	1425	1725	24.9
46.14.000.209	46.14.000.229	1690	1630	1300	1475	1775	25.2
46.14.000.210	46.14.000.230	1740	1680	1350	1525	1825	25.6
46.14.000.211	46.14.000.231	1790	1730	1400	1575	1875	25.9
46.14.000.212	46.14.000.232	1840	1780	1450	1625	1925	26.2
46.14.000.213	46.14.000.233	1890	1830	1500	1675	1975	26.5
46.14.000.214	46.14.000.234	1940	1880	1550	1725	2025	26.8
46.14.000.215	46.14.000.235	1990	1930	1600	1775	2075	27.2
46.14.000.216	46.14.000.236	2040	1980	1650	1825	2125	27.5
46.14.000.217	46.14.000.237	2090	2030	1700	1875	2175	27.8
46.14.000.218	46.14.000.238	2140	2080	1750	1925	2225	28.1
46.14.000.219	46.14.000.239	2190	2130	1800	1975	2275	28.4

Speed up to 140 km/h

Drawbar connection: Clamping components, see accessories on page 120

Recommended wheel size: 4 J x 12 H2

Wheel connections: 4x98; 4x130 on request

Tyres: 155 R 12

Other possible tyre and wheel sizes, see page 140

Special axle supports on request

Also available with waterproof bearings